

Solar Surface - VJET

Applications:



- Small area Irrigation
- Domestic water supply
- Sprinkle Irrigation
- Pressure boosting

Pump Features:

- Stainless steel pump body
- Stainless steel impeller
- Max. liquid temperature: +60°C

DC Controller:

- Protection class: IP65
- Ambient temperature: -15°C ~ 60°C
- LED displays working conditions & fault codes
- Auto start & stop
- Soft start

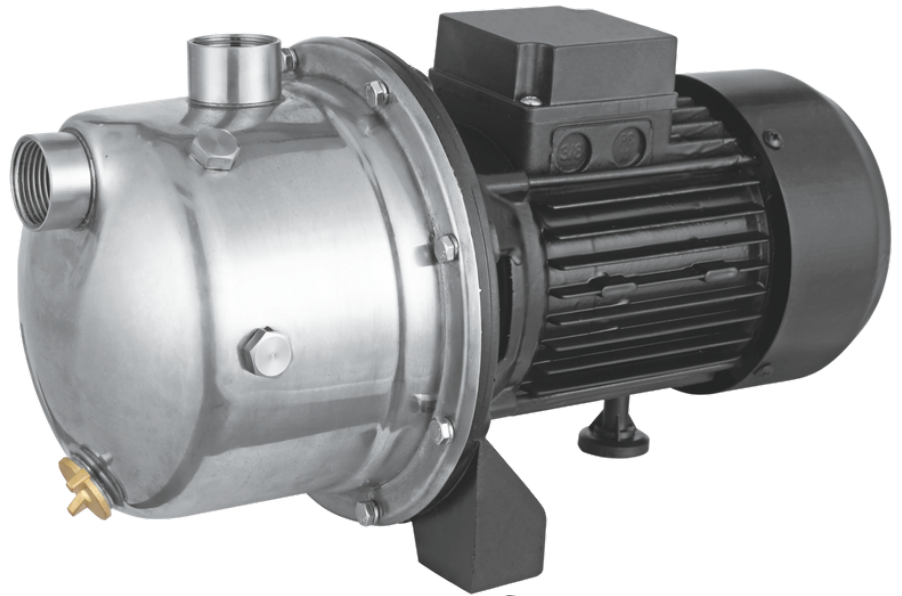

Plastic Impeller



Carbon/Ceramic
Mechanical Seal




Stainless Steel
Volute Casing



CU / NSK Bearings

Performance Curve:

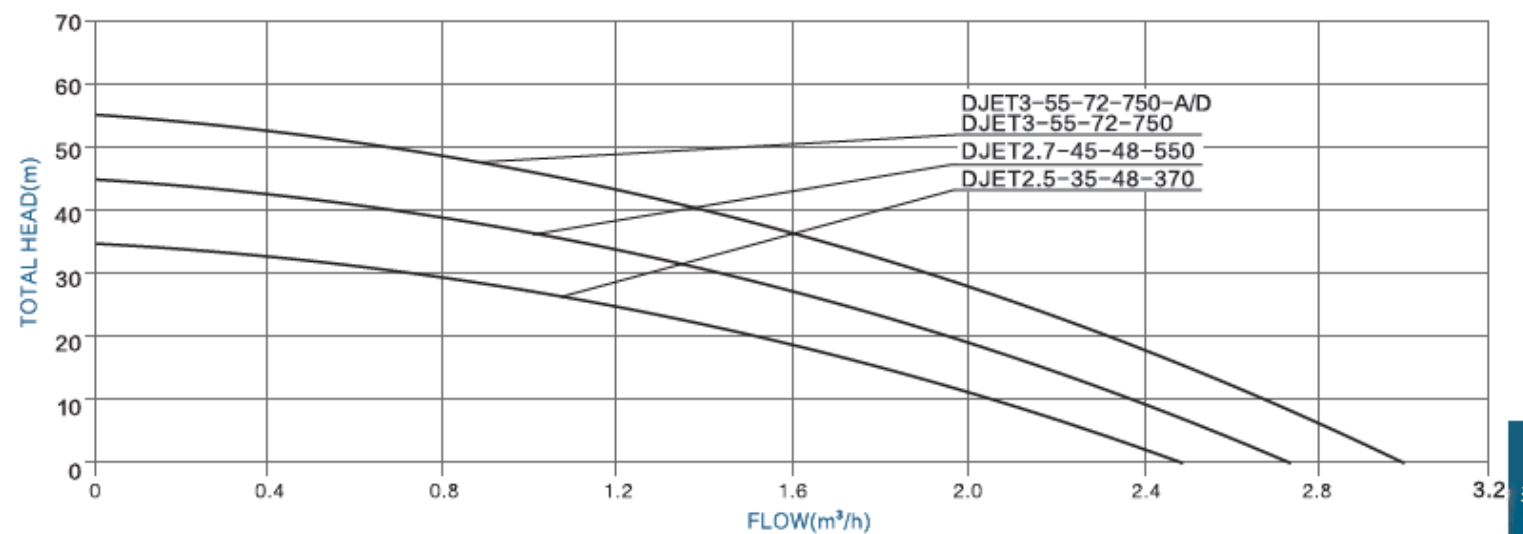

Performance Table:

Model	Power	l/min	0	7	13	20	27	33	40	47	53
	kW	m³/h	0.0	0.4	0.8	1.2	1.6	2.0	2.4	2.8	3.2
DJET2.5-35-48-370	0.37	H(m)	35	32	29	25	19	11	2	-	-
DJET2.7-45-48-550	0.55		45	42	39	34	28	19	9	-	-
DJET3-55-72-750	0.75		55	52	49	43	36	28	18	7	-

Kit Includes:

