

Solar Surface - VCPM

Applications:

- Small area Irrigation
- Domestic water supply
- Sprinkle Irrigation
- Pressure boosting

Pump Features:



- Cast Iron steel pump body
- Brass steel impeller
- Max. liquid temperature: +60°C

DC Controller:

- Protection class: IP65
- Ambient temperature: -15°C ~ 60°C
- LED displays working conditions & fault codes
- Auto start & stop
- Soft start



Performance Curve:

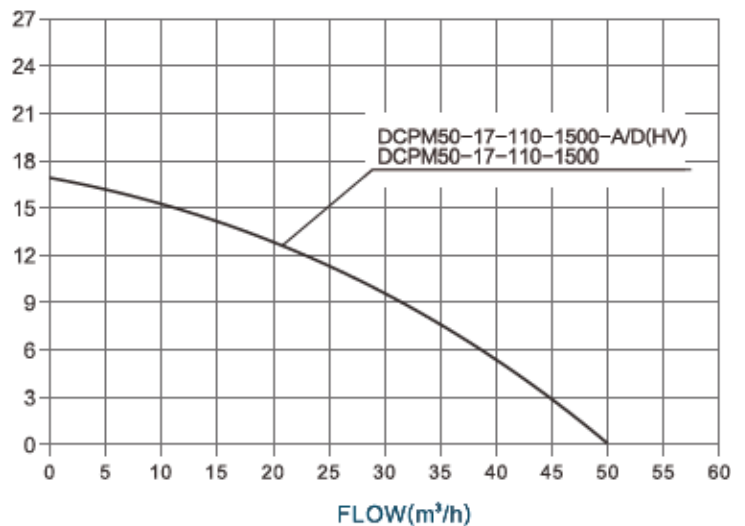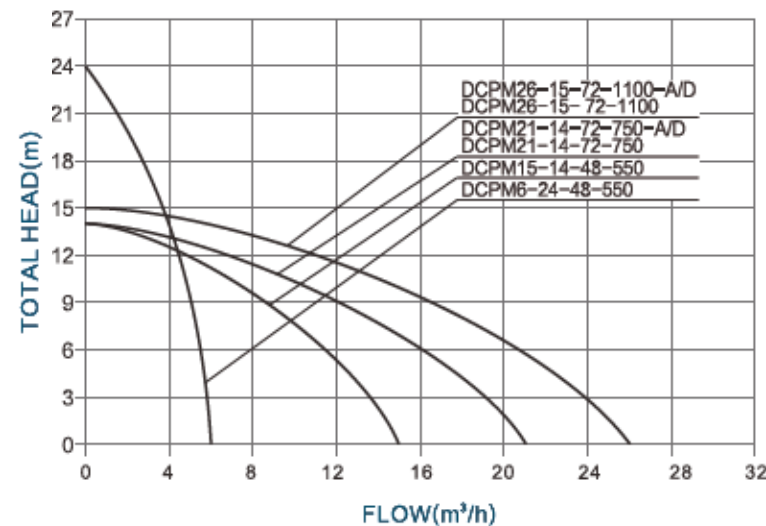

Performance Table:

Model	Power	l/min	0	67	133	200	267	333	400	467
	kW	m³/h	0.0	4.0	8.0	12.0	16.0	20.0	24.0	28.0
DCPM6-24-48-550	0.55	H(m)	24	14	-	-	-	-	-	-
DCPM15-14-48-550	0.55		14	13	9	5	-	-	-	-
DCPM21-14-72-750	0.75		14	13	11	9	6	2	-	-
DCPM26-15-72-1100	1.10		15	14	13	12	9	6	3	-

Model	Power	l/min	0	83	167	250	333	417	500	583	667	750	833
	kW	m³/h	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0
DCPM50-17-110-1500	1.50	⊥	17	16	15	13	13	11	10	7	6	3	0

Kit Includes:

