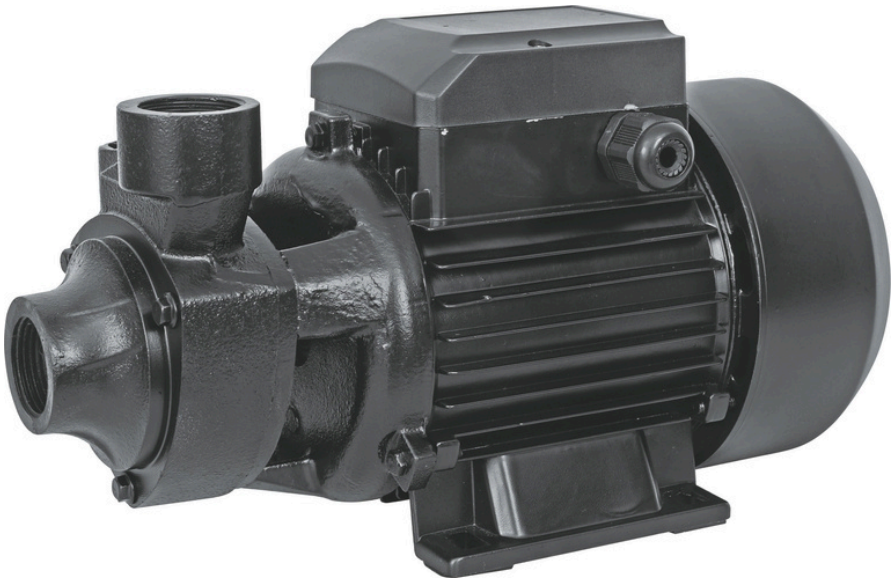
valiqualite

Solar Surface - VQB

Applications:

- Small area Irrigation
- Domestic water supply
- Sprinkle Irrigation
- Pressure boosting



Pump Features:

- Brass impeller
- Ambient temperature: -15°C ~ 60°C
- High efficiency synchronous motor

DC Controller:

• Protection class: IP65
• Ambient temperature: -15°C ~ 60°C
• LED displays working conditions & fault codes
• Auto start & stop
• Soft start

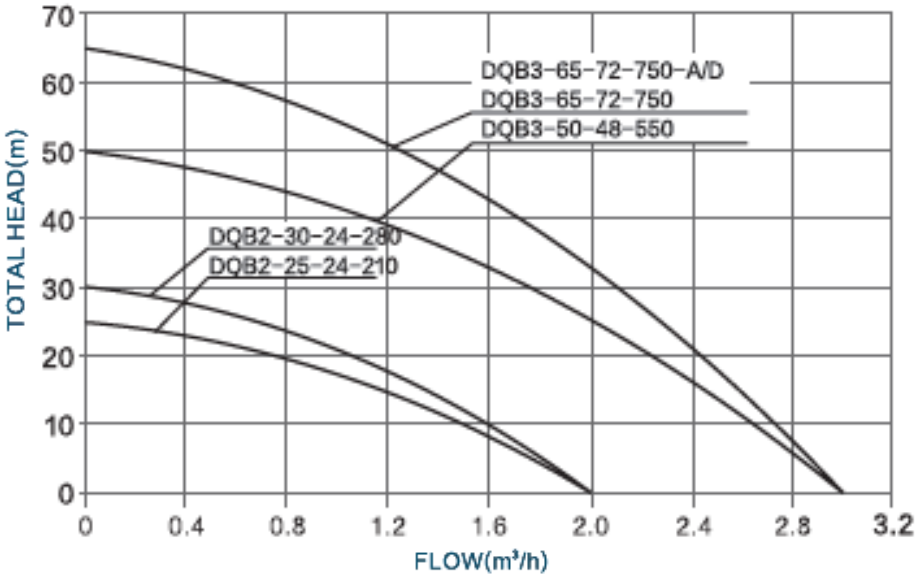

Brass Impeller


Carbon/Ceramic Mechanical Seal


Cast Iron Casing


CU / NSK Bearings

• Performance Curve:



• Performance Table:

Model	Power	l/min	0	7	13	20	27	33	40	47	53
	kW	m³/h	0.0	0.4	0.8	1.2	1.6	2.0	2.4	2.8	3.2
DQB2-25-24-210	0.21	H(m)	25	23	20	15	8	-	-	-	-
DQB2-30-24-280	0.28		30	27	25	18	10	-	-	-	-
DQB3-50-48-550	0.55		50	48	44	39	32	25	15	5	-
DQB3-65-72-750	0.75		65	62	57	50	42	33	21	8	-

• Kit Includes:

